


MR-MWM[®]-Array for Internal & External Corrosion Imaging through Insulation & Weather Jacket

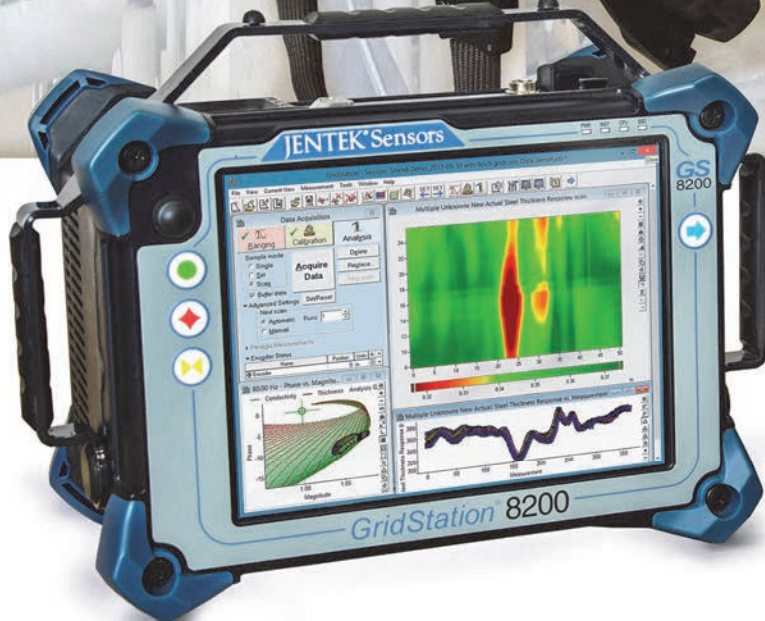


*GridStation[®] 8200
(Integrated)*

The Leader in Eddy Current Testing Performance

JENTEK[®] Sensors

Fast Corrosion Imaging for Piping, Vessels & Column Inspection

- Light weight, ideal for rope access crews
- Manual scanner with encoded C-scan imaging

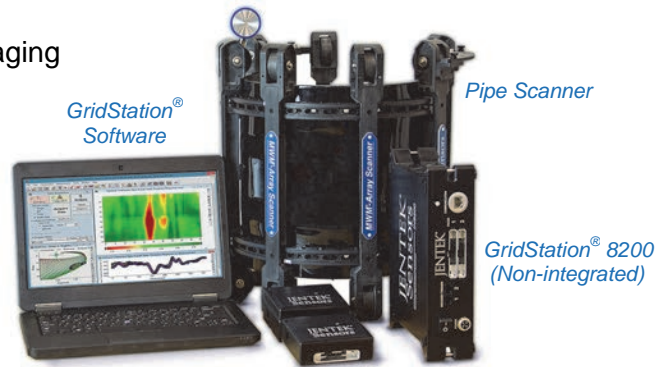

JENTEK Sensors recommends the non-integrated system (IN8200) for field services and the integrated system for special applications in the laboratory, or in certain situations where having an integrated version is preferred.

JENTEK 8200 Corrosion Imaging System Specifications

General	
Pipe Material	Carbon steel, including ASTM A106, ASTM A53, and API 5L.
Pipe Wall Thickness	Up to 0.5 inch
Pipe Diameter (Range)	8.5 inch insulation diameter. For example: 4 inch pipe with >2.0 inch insulation 6 inch pipe with >1.0 inch insulation All larger diameters, including vessels
Insulation Type & Thickness	3.0 inch (max) of any non-conducting insulation material
Weather Jacket Type & Thickness	Up to 0.040 inches. Smooth or corrugated; aluminum or stainless steel (No galvanized steel)
Inspection Scan Speed	4 in./sec with a 8.5 inch wide scan path
Detection Threshold	1 in. diameter at 65% wall loss (average) 2 in. diameter at 50% wall loss (average) 3 in. diameter at 30% wall loss (average) <i>Based on 0.250" pipe wall, 2 inch insulation, aluminum WJ. Detection performance will vary due to pipe wall thickness, insulation thickness as well as weather jacket properties</i>
Components	39 Channel IN8200 Instrument 39 Channel Modular MR Probe Electronics Unit 36 Channel MR-MWM-Array Sensors Laptop
Weight (instrument only)	6 lbs. (2.72 kg) for 39 Channels

Comprehensive training and service support programs are available to NDT service providers.



JENTEK® Sensors, Inc.

110-1 Clematis Avenue, Waltham, MA 02453-7013 USA
Phone: 781-373-9700 • www.jenteksensors.com

GridStation, MWM, and JENTEK Sensors are registered trademarks of JENTEK Sensors, Inc.

JENTEK Issued patents include U.S. Patent #: 8,981,018, 8,960,012, 8,928,316, 8,803,515, 8,768,657, 8,494,810, 8,237,433, 8,222,897, 8,050,883, 7,994,781, 7,876,094, 7,812,601, 7,696,748, 7,589,526, 5,533,575, 7,528,598, 7,526,964, 7,518,360, 7,467,057, 7,451,657, 7,451,639, 7,411,390, 7,385,392, 7,348,771, 7,289,913, 7,280,940, 7,230,421, 7,188,532, 7,183,764, 7,161,351, 7,161,350, 7,106,055, 7,095,224, 7,049,811, 6,995,557, 6,992,482, 6,952,095, 6,798,198, 6,784,662, 6,781,387, 6,727,691, 6,657,429, 6,486,673, 6,433,542, 6,420,867, 6,380,747, 6,377,039, 6,351,120, 6,198,279, 6,188,218, 6,144,206, 5,966,011, 5,793,206, 5,629,621, 5,990,677 and RE39,206 (other patents pending).